


BALLYMACARRETT WALKWAY - SITE LAYOUT & LANDSCAPE PLAN

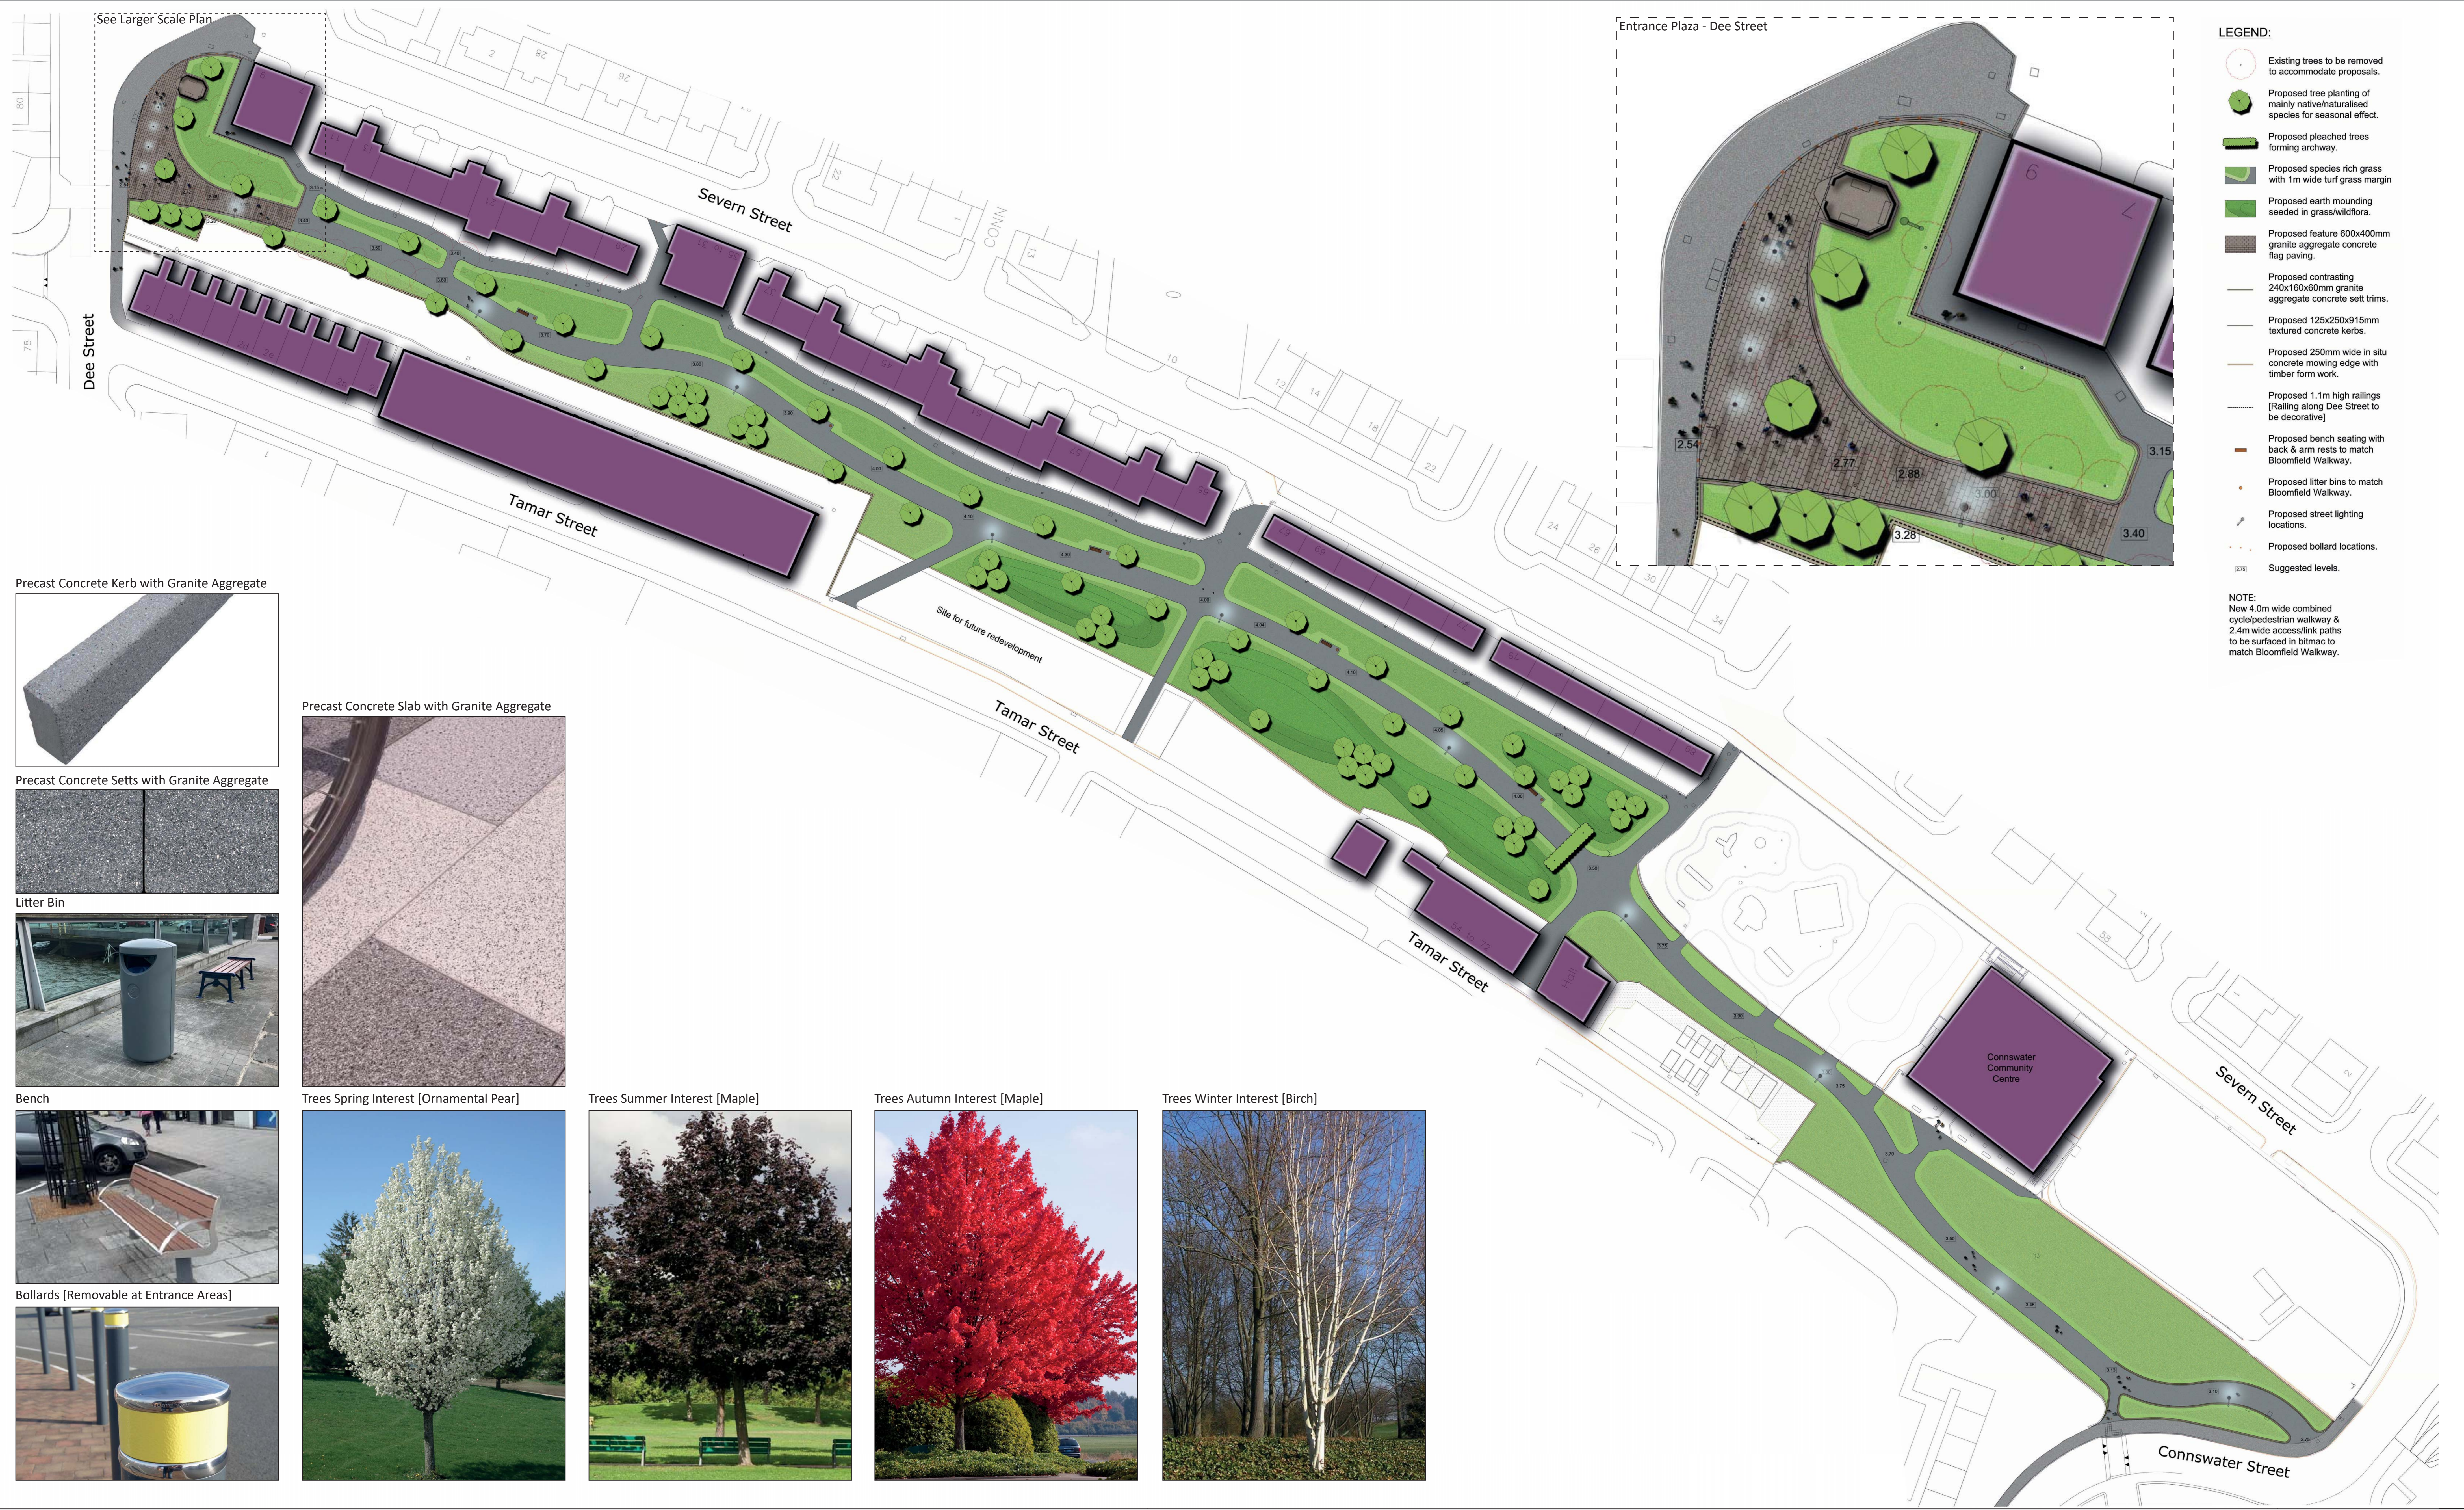

- LEGEND:**
- Existing trees to be removed to accommodate proposals.
 - Proposed tree planting of mainly native/naturalised species for seasonal effect.
 - Proposed pleached trees forming archway.
 - Proposed species rich grass with 1m wide turf grass margin.
 - Proposed earth mounding seeded in grass/wildflora.
 - Proposed feature 600x400mm granite aggregate concrete flag paving.
 - Proposed contrasting 240x160x60mm granite aggregate concrete sett trims.
 - Proposed 125x250x915mm textured concrete kerbs.
 - Proposed 250mm wide in situ concrete mowing edge with timber form work.
 - Proposed 1.1m high railings (Railing along Dee Street to be decorative).
 - Proposed bench seating with back & arm rests to match Bloomfield Walkway.
 - Proposed litter bins to match Bloomfield Walkway.
 - Proposed street lighting locations.
 - Proposed bollard locations.
 - Suggested levels.

NOTE:
New 4.0m wide combined cycle/pedestrian walkway & 2.4m wide access/link paths to be surfaced in bitmac to match Bloomfield Walkway.

Precast Concrete Kerb with Granite Aggregate



Precast Concrete Slab with Granite Aggregate



Precast Concrete Setts with Granite Aggregate



Litter Bin



Bench



Bollards [Removable at Entrance Areas]



Trees Spring Interest [Ornamental Pear]



Trees Summer Interest [Maple]



Trees Autumn Interest [Maple]



Trees Winter Interest [Birch]

